


EXPERT 250A

PNEUMATIC, 16GA NAILS or 15½GA STAPLES

For the installation of Tongue & Groove hardwood flooring

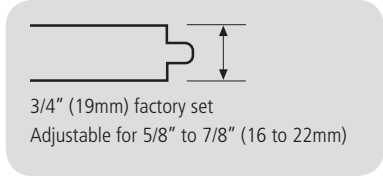

MORE
COMFORT
SPEED
PRECISION
REACH



Primact
striking module inside

Light impact all-around
striking cap

LoadXtend (L/S)



Short casting for
closer end-wall reach

Bi-direction
adjustable base



250 L

Cleats L

16ga

- * 2" / 50mm
- * 1¾" / 45mm
- * 1½" / 38mm

** Also available in stainless steel*

250 T

Cleats T

16ga

- * 2" / 50mm
- * 1½" / 38mm

** Also available in stainless steel*

250 S

Staples S

15½ga

½" (13mm) crown

- 2" / 50mm
- 1¾" / 45mm
- 1½" / 38mm

Weight : 11 lbs (5kg)
Height : 17 ¾" (451mm)
Length : 15" (327 mm)
Width : 5.2" (141mm)

Capacity
- 100 T nails
- 200 L nails LoadXtend
- 138 Staples (3 clips) LoadXtend

Operating pressure
80-110 psi (5,5 -7,6 bar)

Lubrication
A few drops weekly

Thread fitting type
3/8" (9,65mm) NPT

Warranty
7 years on cast
1 year on parts
(excluding wear parts)

Factory set
3/4" (19mm) flooring

Applications
5/8" to 7/8" (16 to 22mm)

Wood
Solid, Engineered,
Domestic or Exotic

Accessories

- 3" (76mm) rotating extension handle (A800)
- **LoadXtend** 300 16ga L type nail channel (P249A)
- **PrimSurfer** roller base add-on kit (A 861)



1135, Jérémie-Fortin
Québec, QC G1J 1R8
Canada

Tel : 1 (418) 522-7744
USA / CAN : 1 (800) 363-1962
UK : +01-418-522 5355
Fax : 1 (418) 522-7466
sales@primatech.ca
www.primatech.ca

* Illustrations are for reference